

Type A EV residual current


Regulation 722.531.2.101 Tripping On:

- ✓ 50Hz sinusoidal AC
- ✓ Pulsating DC
- ✓ Smooth DC ≥ 6 mA (RDC-PD)

Note: Type AEV 30mA RCDs are for use in the protection of individual EV Mode 3 charge points.

General Non-delay characteristics for final circuits.

Ordering reference: see below

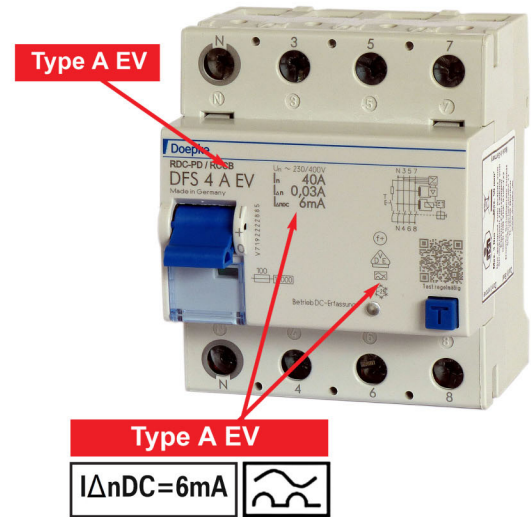

2 pole 230V RCCB				
Time/Current characteristic: General Non-delay				
Modules	Poles	Amps	Sensitivity	Reference
4	2	25	30mA	DFS4-025-2/0.03-AEV
4	2	40	30mA	DFS4-040-2/0.03-AEV

Product Standard: EN61008-1
Approvals: VDE

4 pole 400V RCCB				
Time/Current characteristic: General Non-delay				
Modules	Poles	Amps	Sensitivity	Reference
4	4	40	30mA	DFS4-040-4/0.03-AEV
4	4	63	30mA	DFS4-063-4/0.03-AEV
4	4	80	30mA	DFS4-080-4/0.03-AEV

Have a question? Please contact us today
Tel: **01628 829133** email: **sales@doepke.co.uk**

